

MISSOURI SOUTHERN

STATE UNIVERSITY

OFFICE OF FINANCIAL SERVICES

RFP No: 26-004

BUYER: Kristy Jennings, Finance Accountant

Date: 03/17/2026

Email: Jennings-k@mssu.edu

ADDENDUM #1

Funding Department:

Athletics

Equipment/Services Requested:

Videoboard Replacement

Please submit this signed addendum with your bid response.

Please Note: See below for clarification and additional information:

BID DUE DATE UPDATED TO 3/30/26 AT 3:30PM CST IN THE RON RICHARD ATHLETIC CENTER ROOM 212A

1. What specifically does the on-site labor warranty cover?
 - a. Comprehensive on-site labor for maintenance, repairs, and control system issues for a specified amount of time.
2. What is the roof weight capacity of the building in the truss section the center hung is to be installed?
 - a. Current scoreboard is 3800lbs. Anything exceeding 3800lbs, contractor will be required to work with an engineer before installation to ensure weight capacity is not exceeded. Current videoboard is not setup with winching system. New videoboard needs to be installed with a winching system and as such, if this exceeds 3800lbs, contractor will need to work with an engineer before installation.
3. What are the existing attachment points to the ceiling?
 - a. Attachment S1 below identifies the existing attachment points for the current videoboard.
4. Do we have the ability to come and take a look at the project and meet with the AD?
 - a. Yes, please reach out to Cori Reid, 417-625-3576 to schedule a time to meet and view the space.
5. On alternate #4, what is the minimum pixel pitch of the wall mount displays?
 - a. 3.9MM


6. Will the fixed digit clocks on the walls be replaced or just taken out?
 - a. Replaced
7. The removal of existing display is not on the scope of work in the RFP. Is removal required of contractor?
 - a. Contractor will be required to remove and properly dispose of the current videoboard as part of the scope of work.
8. Who is to provide primary power and data?
 - a. Electrical and Data should be included in the bids as provided by the vendor.
9. Is a lower scrim required?
 - a. Yes, a lower scrim is required for this scope of work.
10. What is the project timeline?
 - a. In the scope of work, #7 states “Please provide an installation schedule/timeline for this project as part of your bid.” So we are asking the contractor to supply what their timeline would be for this project.
11. Please provide the specifications for the front-end video switcher, replay system, specific cameras with quantities and input requirements?
 - a. The front-end video switcher should support multiple HD inputs, real-time graphics layering, and seamless integration with the venue’s scoreboard and videoboard systems. The replay solution should provide multi-channel recording and playback with slow-motion capability and an operator-friendly interface. Total of four cameras. Requirements include a mix of manned and fixed-position units capable of capturing high-quality 1080p video.
12. Please provide the specifications and specific requirements for the sound system we are being asked to provide.
 - a. At this time, MSSU is removing alternate #2 “Gymnasium Sound System” and will go out for a separate RFP at a later date for this part. Please do not provide a response for Alternate #2.
13. Is there a drawing/rendering for reference showing the required four (4) Ad Panels placement?
 - a. There are no predetermined locations for advertising panels; the vendor may propose suitable placement based on the videoboard’s dimensions.
14. Who is responsible for covering the floor during the work for this project, Contractor or MSSU?

- a. The Contractor will be required to cover the floor and surrounding areas during installation to ensure no damages occur during any part of this project.

This Addendum is hereby considered to be a part of the original bid specifications and needs to be signed and returned with your bid in order to be considered.

Signature

Date

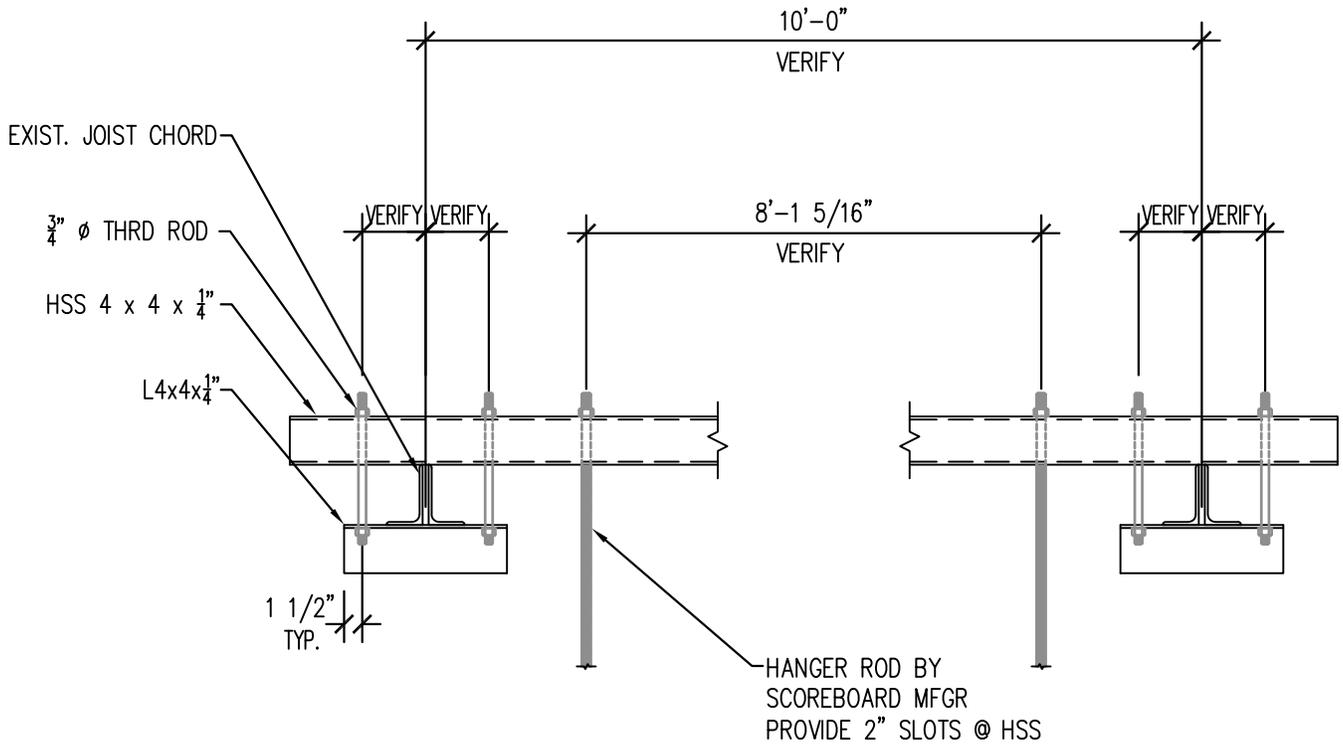

NOTE:
JOISTS DO NOT REQUIRE CHORD
OR WEB REINFORCEMENT FOR NEW
3800 lb SCOREBOARD

NOTE:
SCOREBOARD PROVIDER SHALL
COORDINATE ATTACHMENT TO
ROOF FRMG. w/ ENGINEER &
OWNER

SECTION ISI.I
NTS



1968 S. HALL
WEBB CITY, MO. 64870

PHONE: 1-417-673-0463
FAX: 1-417-673-0465


LEGGETT AND PLATT
NEW SCOREBOARD

BY: NT

DATE: 3-12-13

DWG: 1

SCALE: NTS

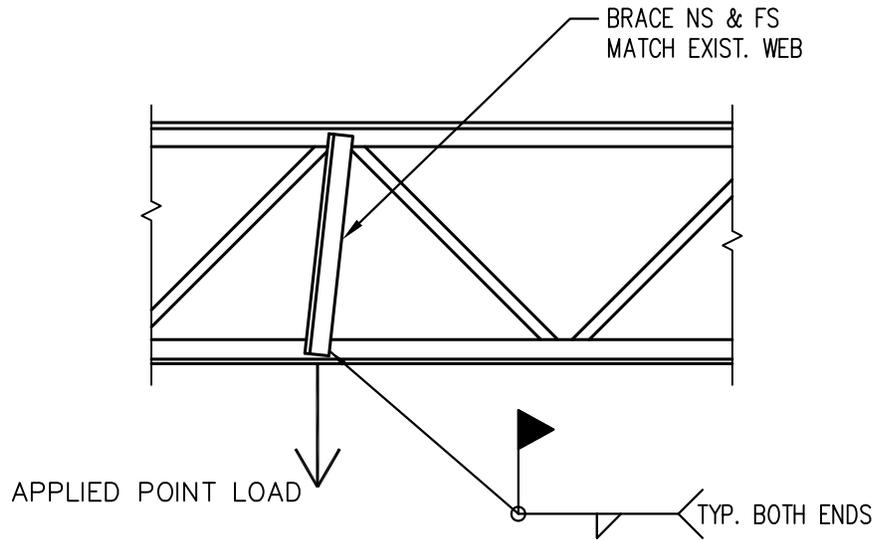

DETAIL - POINT LOAD @ JOIST
NTS

IS2.1



1968 S. HALL
WEBB CITY, MO. 64870

PHONE: 1-417-673-0463
FAX: 1-417-673-0465

LEGGETT AND PLATT
NEW SCOREBOARD

BY: NT

DATE: 3-12-13

DWG: 2

SCALE: NTS